

Product Highlights

Comprehensive Management Solution

Advanced features such as WAN failover, load balancing and integrated firewall make this a reliable, secure, and flexible way to manage your network

Complete VPN Features

With fully featured VPN as well as IPSec hub-and-spoke technology, secure communications between mobile employees and offices can be configured easily

Web Authentication Capabilities

Captive Portal allows employees and guest users to be easily authenticated and authorized by accessing customized landing pages



DSR Series

Unified Services Routers

Features

High-Performance VPN

- Protocols
 - IPSec, PPTP/L2TP, GRE, SSL, OpenVPN
- VPN Tunnels
 - DES, 3DES, AES, Blowfish, Twofish, CAST128
 - Hub and Spoke

Enhanced Network Service

- IPv6
- IEEE 802.11q VLAN
- Multiple SSIDs¹
- Port Monitoring/Bandwidth Control
- IGMP Proxy, IGMP Snooping
- Web Content Filtering
- Web Authentication Capabilities

Wireless Access and Security

- IEEE 802.11 a²/b/g/n/ac²
- IEEE 802.1x RADIUS Authentication with EAP-TLS, EAP-TLLS, EAP-PEAP
- WPS, WEP, WPA-PSK, WPA-EAP, WPA2-PSK, WPA2-EAP

Fault Tolerance³

- WAN Traffic Failover & Outbound Load Balancing

The D-Link DSR Series Unified Services Routers provide secure, high-performance networking solutions to address the growing needs of small and medium businesses. With integrated high-speed wireless¹ technology, the DSR series routers offer comparable performance to wired networks, but with fewer limitations. Next generation wireless performance is available on the DSR-500AC and DSR-1000AC, which introduces 802.11ac support to the family. Available on the 5 GHz band, the combination of wider Radio Frequency bandwidths take data rates available to clients supporting the wireless AC standard to the next level.

Comprehensive Management Capabilities

The DSR-500/500AC and DSR-1000/1000AC Unified Services Routers include dual WAN Gigabit Ethernet ports to provide high availability for your WAN or Internet connections. Traffic can be load-balanced across the links with Outbound Load Balancing, increasing the performance and availability of business applications. The secondary WAN port can also be used to create a DMZ, isolating servers from your LAN. The DSR series supports mobile broadband networks via an extendable USB modem⁴, such as 3G or 4G⁸ dongles. Traffic load balancing can be performed on the mobile data connections, providing an additional layer of redundancy for critical or backup applications.

Web Authentication Capabilities

Captive Portal allows employees and guest users to be easily authenticated and authorized by accessing a customized landing page. Users can be authenticated by a local database, RADIUS, LDAP, Microsoft Windows Active Directory, NT Domain and POP3 server. A maximum of four servers can be configured at any one time.


Complete and Robust VPN Features

A fully featured virtual private network (VPN) provides your mobile workers and branch offices with a secure link to your network. The DSR series routers are capable of Secure Sockets Layer (SSL) VPN tunnels, as well as Generic Routing Encapsulation (GRE) tunnels, empowering your mobile users by providing remote access to a central corporate database. Site-to-site VPN tunnels use IP Security (IPSec) Protocol, Point-to-Point Tunneling Protocol (PPTP), or Layer 2 Tunneling Protocol (L2TP) to facilitate branch office connectivity through encrypted virtual links. OpenVPN allows mobile users to connect to the intranet via encrypted links with their PC, laptops or mobile devices.


Web Content Filtering

The DSR series also provides a web content filtering feature to help administrators monitor, manage and control employees' Internet usage. Static web content filtering helps to remove malicious objects such as Java applets, ActiveX, and cookies, or to block URLs by keyword. Dynamic web content filtering, which requires a license subscription, allows administrators to filter content from a list of categories. Multiple global index servers, with millions of URLs and real-time website data, enhance performance and maximize service availability.

Web Content Filtering for HTTP/HTTPs

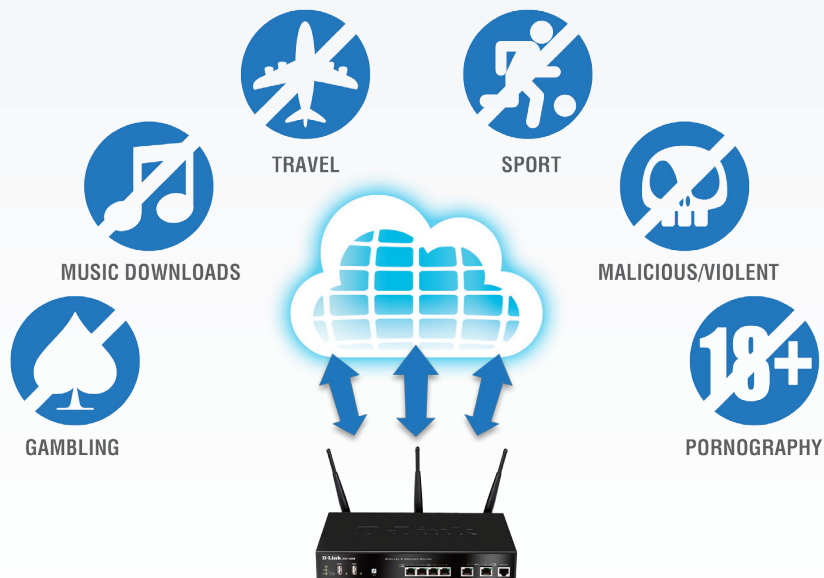


USB 2.0 Extension

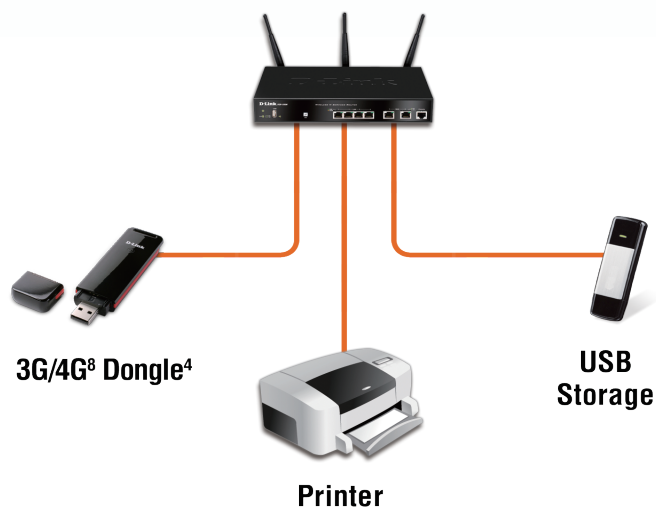


Supports one (DSR-150/150N/250/250N/500/500AC) or two (DSR-1000/1000AC) USB 2.0 devices to extend functionality.

Secure VPN Network Implementation

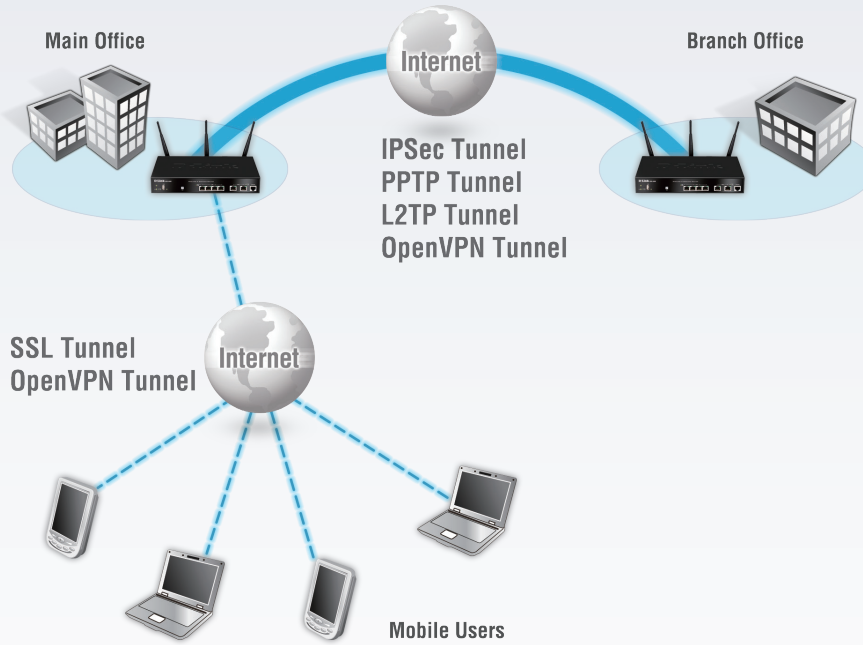

Dual WAN for Redundant Internet

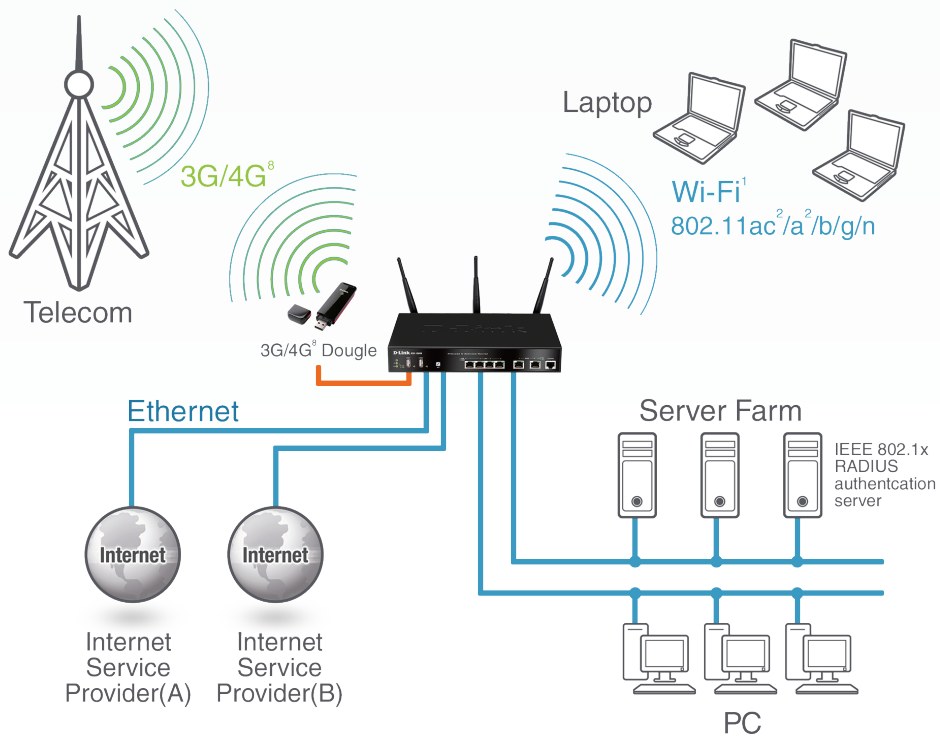

Technical Specifications				
General	DSR-150/150N	DSR-250/250N	DSR-500/500AC	DSR-1000/1000AC
Hardware Version	A2	DSR-250 A2 DSR-250N B1	DSR-500 B1 DSR-500AC A1	DSR-1000 B1 DSR-1000AC A1
Ethernet Interface	10/100 Mbps WAN Port 8 10/100 Mbps LAN Ports	10/100/1000 Mbps WAN Port 8 10/100/1000 Mbps LAN Ports	2 10/100/1000 Mbps WAN Ports 4 10/100/1000 Mbps LAN Ports	2 10/100/1000 Mbps WAN Ports 4 10/100/1000 Mbps LAN Ports
Wireless Interface	802.11 b/g/n (Single Band) 2 Internal 2dBi Omni-Directional Antennas	802.11 b/g/n (Single Band) 2 Detachable 2 dBi Omni-Directional Antennas	802.11 ac/a/b/g/n (Selectable dual band) 2 Detachable 2 dBi Omni-Directional Antennas	802.11 ac/a/b/g/n (Concurrent dual band) 3 Detachable 2 dBi Omni-Directional Antennas
USB 2.0 Port	1			2
Console Port	RJ-45			
Performance ⁶				
Firewall Throughput ⁵	95 Mbps	750 Mbps	950 Mbps	950 Mbps
VPN Throughput (3DES) ⁷	40 Mbps	50 Mbps	200 Mbps	250 Mbps
Concurrent Sessions	20,000		50,000	100,000
New Sessions (per second)	200		500	1000
Firewall Policies	200		600	600
Internet Connection Type				
Static/Dynamic IP	✓			
PPPoE/L2TP/PPTP	✓			
Multiple PPPoE	✓			
Firewall System				
Static Route	✓			
Dynamic Route	—	RIP v1/v2, OSPF, OSPFv3		
Dynamic DNS	✓			
Inter-VLAN Route	✓			
NAT, PAT	✓			
Web Content Filtering	Static URL, Keywords, Dynamic WCF (License is required)			
Intrusion Prevention System (IPS)	—	Signature Package Included in Firmware		
Authentication	Internal User Database, Radius, POP3, LDAP, AD, NT Domain			

Technical Specifications				
Networking	DSR-150/150N	DSR-250/250N	DSR-500/500AC	DSR-1000/1000AC
DHCP Server/Client			✓	
DHCP Relay			✓	
IEEE 802.11q VLAN			✓	
VLAN (port-based)			✓	
IP Multicast	IGMP Proxy, IGMP Snooping			
IPv6			✓	
Route Failover	—			✓
Outbound Load Balancing	—			✓
3G/4G ⁸ Redundancy			✓	
Wireless ¹				
Multiple Service Set Identifier (SSID)			✓	
Service Set Identifier (SSID) to VLAN Mapping			✓	
Standard	802.11 b/g/n		802.11 ac/a/b/g/n	
Wireless Security	Wired Equivalent Privacy (WEP) Wi-Fi Protect Setup (WPS) Wi-Fi Protected Access – Personal (WPA-PSK) Wi-Fi Protected Access – Enterprise (WPA-EAP) Wi-Fi Protected Access version 2 – Personal (WPA-PSK) Wi-Fi Protected Access version 2 – Enterprise (WPA-EAP)			
Virtual Private Network (VPN)				
VPN Tunnels	36	75	95	155
IPSec Tunnels	10	25	35	70
SSL VPN Tunnels	1	5	10	20
PPTP/L2TP Tunnels	10		25	
GRE	5	10	15	20
OpenVPN Tunnels		10		20
Encryption Methods	DES, 3DES, AES, Twofish, Blowfish, CAST-128, NULL			
SSL Encryption Methods	RC4-128, 3DES, AES			
IPSec/PPTP/L2TP/OpenVPN Server			✓	
IPSec NAT Traversal			✓	
Dead Peer Detection			✓	
IP Encapsulating Security Payload (ESP)			✓	
IP Authentication Header (AH)			✓	
VPN Tunnel Keep Alive			✓	
Hub and Spoke			✓	

DSR Series Unified Services Routers

Technical Specifications				
Bandwidth Management	DSR-150/150N	DSR-250/250N	DSR-500/500AC	DSR-1000/1000AC
Maximum Bandwidth Control	✓			
Priority Bandwidth Control	Port-based QoS 3 Classes			
System Management				
Web-based User Interface	✓			
Command Line	✓			
SNMP	v1, v2c, v3			
Physical & Environment				
Power Supply	External Power Supply Unit DC 12 V/1.5 A		External Power Supply Unit DC 12 V/2.5 A	External Power Supply Unit DSR-1000: DC 12 V/2.5 A DSR-1000AC: DC 12 V/3 A
Max. Power Consumption	7.44 W/ 10.5 W	11.8 W/ 12.6 W	11.03 W/ 13.1 W	20.69 W/ 23.1 W
Dimensions (L x W x H)	208 x 118 x 35 mm (8.19 x 4.65 x 1.38 inches)	140 x 203 x 35 mm (5.51 x 8.0 x 1.38 inches)	180 x 280 x 44 mm (7.09 x 11.02 x 1.73 inches)	
Operation Temperature	0 to 40 °C (32 to 104 °F)			
Storage Temperature	-20 to 70 °C (-4 to 158 °F)			
Operation Humidity	5% to 95% non-condensing			
EMI/EMC	FCC Class B, CE Class B, RCM, IC			FCC Class B, CE Class B, RCM, IC, VCCI
Safety	cUL, LVD (EN60950-1)			
3rd Party Certification	IPv6 Ready, Wi-Fi, VPNC AES Interop, VPNC Basic Interop			
MTBF	240,000 hours	250,000 hours	360,000 hours	

¹ DSR-150N/250N/500AC/1000AC only.

² DSR-500AC/1000AC only.

³ DSR-500/500AC/1000/1000AC only.

⁴ The following portable modem are supported: DWM-152 A1/A2/A3, DWM-156 A1/A2/A3/A5/A6/A7, DWM-157 A1/B1, DWM-158 D1, DWP-156 A1/B1, DWP-157 A1/B1, Huawei E1550, E173, E303 and EC306.

⁵ Firewall throughput is measured using UDP traffic with a 1,518 bytes packet size, adhering to RFC2544.

⁶ Actual performance may vary depending on network conditions and activated services.

⁷ VPN throughput is measured using UDP traffic with the packet size 1420 bytes and encryption method 3DES plus SHA-1, adhering to PFC2544.

⁸ Available with future firmware upgrade.

Updated 2015/08/11